


smart XS

smartXS is compact and robust 'Access and Time Attendance' system. In current scenario where security requirements are becoming stringent, we provide different access control and Identification systems to meet modern security needs. The systems are reliable, robust, easy to install with minimum support.

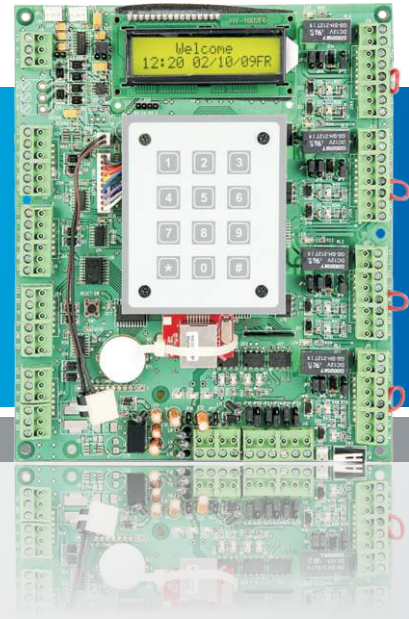

Key Features

- Stores 50,000 Cards & 1,00,000 Event buffers.
- Configurable card or fingerprint verification for logging in to the device for extra security.
- Email sending facility through Controller in offline mode in case of critical events like Unauthorized access, fire etc.
- Data can be Downloaded on the software by mapping the IP address of the controller making it more secure.
- Duress card implementation for enhanced security.
- Door Configuration from Standalone to Multi-door applications.
- HID Compatible (HID PROX 125 KHZ and HID iCLASS 13.56 Mhz Smart Card Technology).
- Advanced access control features like Anti-passback, Facility Code, and Time Zones.



application areas

- Banks
- Government Sectors
- Physical Access Control

Benefits:

- Easy to configure and install
- Supports Proximity/Smart card/HID readers.
- User-friendly Access Management Software.
- Minimum support required.

Software Features:

- User-friendly software GUI.
- Advanced Shift Management and Attendance Features.
- Access Control Configuration (Doors, Time Zones, Door Open Time, DOTL etc.)
- Cater to the needs from Small offices & Single location to Multi-Company, Multi-location & Multi-Divisions.
- Payroll Interface for any payroll package.
- Various versions: smartSOFT™ Classic/Professional Plus/Advance/Enterprise.
(Visit www.smartisystems.com for more details)

Specifications	SMN230 Series	SMN430 Series
System Features		
CPU	32 Bit RISC ARM	
Memory	4 MB	
Door Control	2	4
Number of Readers	2	4
Control Relay Output	2	4
Event Buffers	1,00,000	
Card Buffers	50000	
Reader Interface	26/32/34/35 Wiegand	
Input Points	1 Fire Input	
LCD	YES	
Keypad	12 Key Numeric	
Inputs/Outputs	2 I/p (Door Status, Egress), 2 O/p (DOTL, Lock)	4 I/p (Door Status, Egress), 4 O/p (DOTL, Lock)
Communication ports	TCP/IP	
Controller ID	Upto 128	
Baud rate	9600bps (Default)	
Power Supply	12v DC-5A max	
Color	Siemens Grey	
Battery Backup Power Supply	In Built	
Biometrics Connectivity	Yes (Wiegand)	
Approval	CE	
Access Control Features		
Facility Code	Available	
Time Zone / Access Levels	63 + 1(Free Time Zone)/Unlimited	
Anti-Passback	Hard, Soft, Escort, Userwise	Hard, Soft, Areawise, Escort, Userwise
Holiday Settings	42	
Time Zone Slots	4 Slots per day	
Security Features		
Duress card	Available	
Data Download Security	Available	
Accessibility to Menu Functions	Configurable	
Secured Admin Login	Available using card	
Software Required		
Access Management Software	SSE Series (New)	
Attendance/Reporting Soft. (Opt)	Professional Plus; Advance; Enterprise	

*Specifications and features are subject to change without prior notice.